



Accurate Manufacturing Company

Designer Series Ordering Specifications

Customer _____

P.O.# _____

Address _____

Phone # _____

Fax # _____

Taxable: Yes No _____

Payment Terms _____

Shipping Instructions: _____

Die Set Series / Quantity _____

Bushing Style: AA,AX,SS,LS,AC,LAC,XLAC _____

A= _____

Shank Diameter _____

B= _____

Shank Location _____

D= Die Shoe Thickness _____

T or R dimension if not standard _____

E= Punch Holder _____

Lead Time _____

O= Pin Diameter _____


Die Set Price \$ _____

P= Pin Diameter _____

Shipping Cost \$ _____

L= Pin Length _____

Total \$ _____

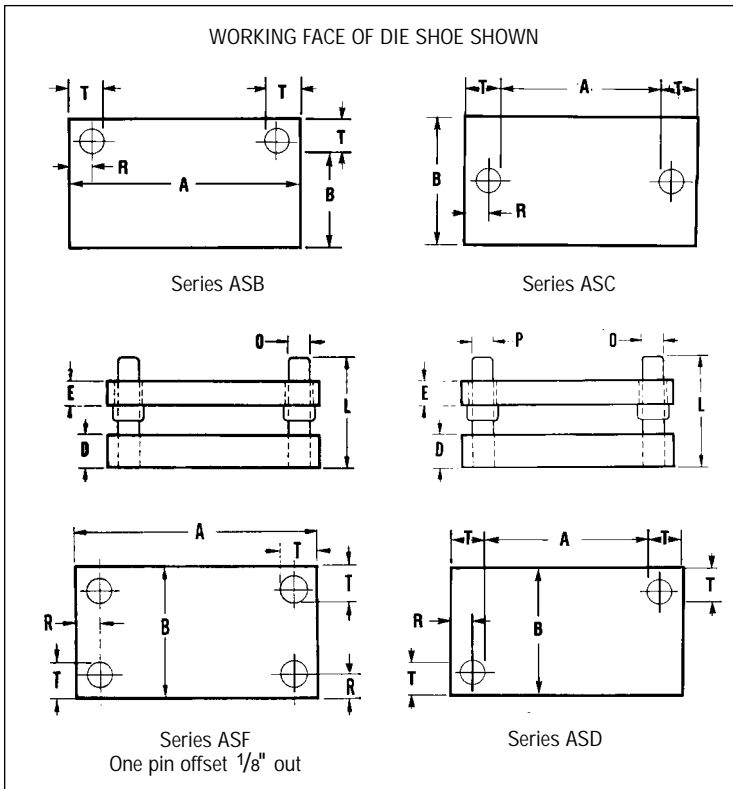

AVAILABLE CLAMPING ARRANGEMENTS (Please circle one)

Clamp Arrangement Selection Data			Bushing Diameter
L-R Feed	F-B Feed	Round Dies	
			3/4" ID to 1 3/4" ID
			2" ID
			2 1/2" ID and 3" ID

To determine the standard distance from the edge of the plate to the inside edge of the pin use the T dimension in the chart below.

Pin Diameter	3/4	7/8	1	1 1/4	1 1/2	1 3/4	2	2 1/2	3
T Dimension	1 5/8	1 13/16	2	2 3/8	2 3/4	3 1/8	3 1/2	4 1/4	5

PIN LOCATION FORMULA: R dim. = Pin Diam. + 1/2"